

Sanisub 400

Sanisub 400 is a submersible clear water pump for flood water from living rooms or cellars. It can lift water up to 7.5 m. It is triggered automatically thanks to its integrated lever float. Versatile, it can be transformed into a low suction pump for residual water by using its removable strainer and the float lock for continuous operation.

PERFORMANCES


- Total manometric head: 7.5 m
- Max. flow rate: 7 m³/h

PRODUCT BENEFITS


- Automatic triggering
- Immersion depth of 7 m
- Suction up to 5 mm without strainer
- 10 mm solid handling capacity
- Integrated non-return valve
- Float locking ring supplied



CURVE

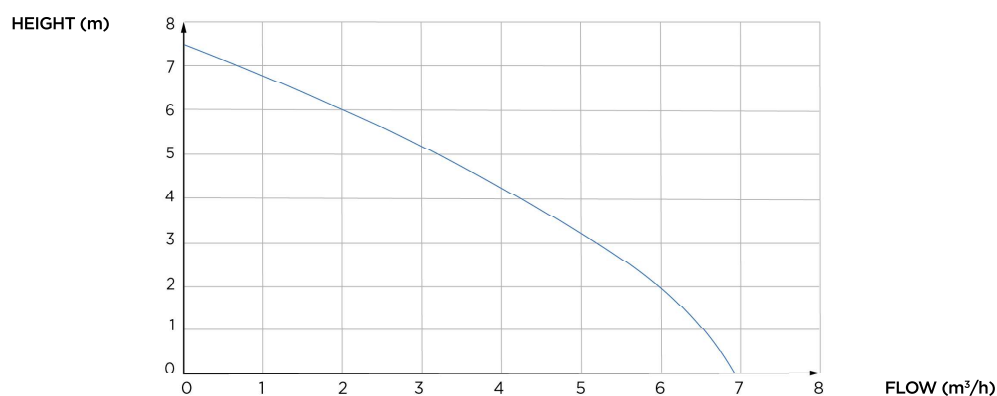

DIMENSIONS

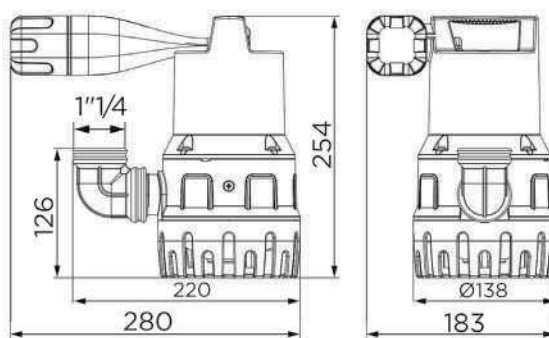

Sanisub 400

Materials	
Pump housing	PP GF
Shaft	Stainless steel
Waterproofing	NBR
Motor housing	Stainless steel
Impeller	PA 6 GF
Electrical features	
Voltage (V)	230
Frequency (Hz)	50-60
Power consumption P1 (P=power) (W)	400
Power output P2 (P=power) (W)	180
RPM (=revolution per minute) (tours/min)	2800
Electrical class	I
Immersion depth (m)	7
Power cable Length (m)	10
Hydraulics	
Total manometric head (m)	7.5
Max. flow rate (m³/h)	7
Discharge diameter G (pouces)	1 1/4
ON Level/OFF level (mm)	200/50
Particle size (mm)	10
Max. temperature of the pumped liquid (5 min)	70°C
Type of wheel	Multi-channel
Type of activation	Float
Logistics	
Gross weight (kg)	4.6
EAN code	3308815081632
Factory code	SANISUB-005