

Sanisub ZPK

Sanisub ZPK is a cellar pump available in 2 models designed for pumping lightly laden water: cellars, garages and rainwater manholes.

It is resistant to hot water up to 90°C for short periods. Sanisub ZPK is triggered automatically by an adjustable float and can pump water up to 10 m with a grain size of 10 to 30 mm. All versions are supplied with a 90° connection bend of DN25 or DN32 (depending on model) and a 10 m supply cable with plug.



PERFORMANCES

- Total manometric head: 10 m
- Max. flow rate: 10 m³/h


DEPENDING ON MODEL

PRODUCT BENEFITS


- Lifting height up to 10 m
- Grain size from 10 mm to 30 mm
- Resistance to water up to 90 °C (short periods)
- Modular switching level through the fixing eyelet



COURBE DE DÉBIT

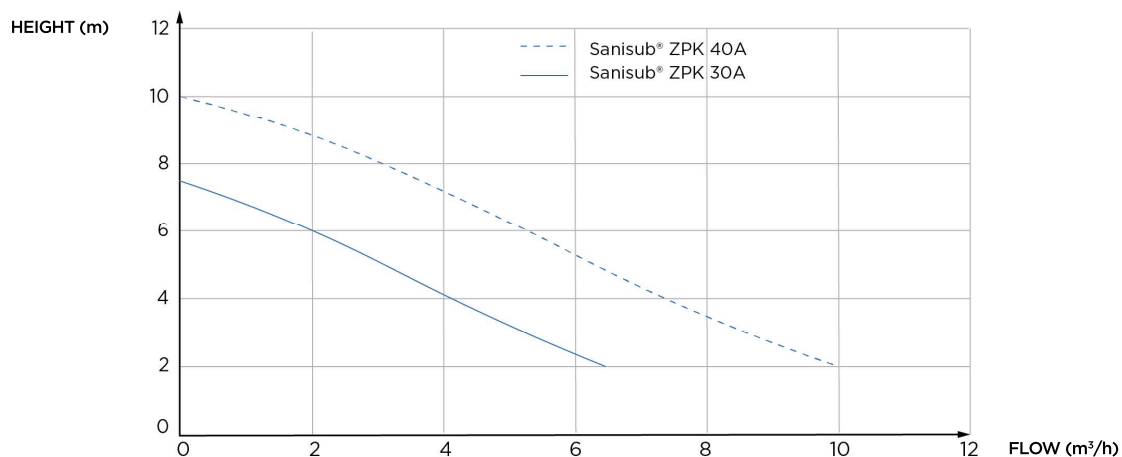

DIMENSIONS

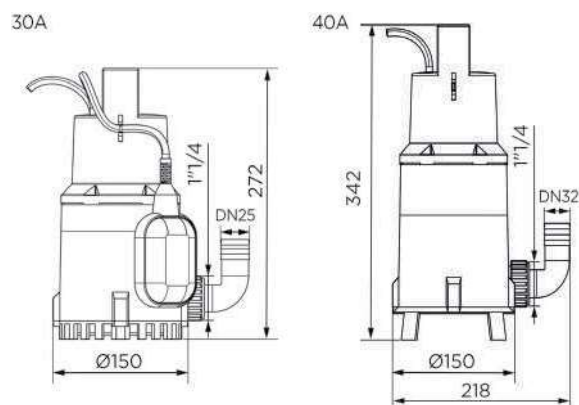

	Sanisub ZPK 30 A	Sanisub ZPK 40 A
Materials		
Pump housing	PP GF	PP GF
Shaft	Stainless steel	Stainless steel
Waterproofing	Carbon/ceramic	Carbon/ceramic
Motor housing Stainless steel Stainless steel	Stainless steel	Stainless steel
Impeller	PA 6 GF	PA 6 GF
Electrical features		
Voltage (V)	230	230
Frequency (Hz)	50-60	50-60
Power consumption P1 (P=power) (W)	300	850
Power output P2 (P=power) (W)	130	430
RPM (=revolution per minute) (tours/min)	2800	2800
Electrical class	I	I
Immersion depth (m)	5	5
Power cable : Length (m)	10	10
Hydraulics		
Total manometric head (m)	7.5	10
Max. flow rate (m3/h)	7	10
Discharge diameter G (pouces)	1 1/4	1 1/4
Particle size (mm)	10	30
Type of wheel Multi-channel Multi-channel	Multi-channel	Multi-channel
Max. temperature of the pumped liquid (5 min)	90°C	90°C
Type of activation	Float	Float
Identification and logistics		
Gross weight (kg)	4.48	6.43
EAN code	3308815081434	3308815081441
Factory code	SANISUB-001	SANISUB-002