

APPLICATIONS



Air conditioner

PUMPING

6 m



WARRANTIES & EXTENSIONS pg.11



References:
Sanicondens®
Clim mini S
EAN 3308815083520
CLIMMINI3S

Sanicondens®
Clim pack S
white downspout
EAN 3308815083919
CLIMPACK3SBL

AIR CONDITIONING PUMPS

Sanicondens®
Clim mini S



Sanicondens®
Clim mini S comes with
an anti-drain vacuum
breaker as standard

Sanicondens®
Clim pack S



Sanicondens® Clim mini S Sanicondens® Clim pack S



Security system (130 °C thermal protector, overflow alarm switch).

Easy control: transparent base.

Anti-drain with vacuum breaker as standard.

Clim pack

Easy assembly (fixing and connection accessories supplied)
Reversible plate (right/left).

Silent: Only 21 dB(A).

Clim mini


A miniature pump with increased compactness for completely discreet installation.

Clim pack

A complete solution for an attractive installation.



OPERATING PRINCIPLE

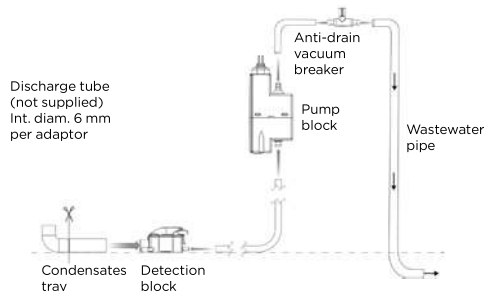

TECHNICAL FEATURES

Noise level	21 dB(A)
Possible connections	Air conditioners up to 8 kW
Ø of the inlet	16 mm
Ø of drainage pipe	6 mm
Maximum flow	9 l/hr +/- 15%
Maximum incoming water temperature	35 °C
Maximum suction (between the detection unit and the pump)	2 m
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	22 W
Protection rating (IP)	IP20

PACKING LIST

Pump, detection unit, downspout (only on Sanicondens® Clim pack S)
1.2 m flexible pipe, mounting bracket, vent tube, power cable supplied, vacuum breaker

DIMENSIONS - PUMP PERFORMANCE CURVE

